


# Mini Met Polyester Film Capacitor – JFE

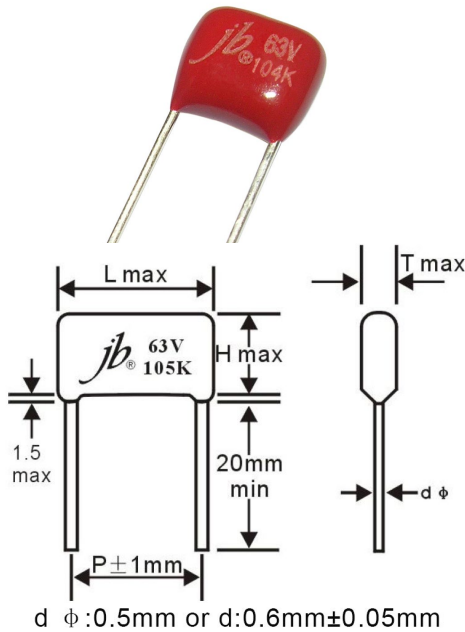

## FEATURES

- Miniature size, non-inductive, epoxy dip coated.
- The small size can be compared favorably with the stacked film capacitor.
- Epoxy resin powder coating provides the identical outer appearance.
- Low dissipation factor.
- Excellent self-healing property and reliability.

## SPECIFICATIONS

Operating Temperature	-40°C ~ +85°C
Rated Voltage	50/63V, 100V, 250V, 400V, 630V.DC
Capacitance Range	0.001 ~ 3.3 μF
Capacitance Tolerance	±5%
Insulation Resistance	C ≤ 0.33 μF ≥ 3750MΩ ; C > 0.33 μF ≥ 1250S (20°C, 1min)
Dissipation Factor	≤ 1.0% (20°C, 1KHz)

## STANDARD SIZE (mm)

VDC Mfd	50/63V				100V			
	L	T	H	P	L	T	H	P
0.001~0.0056	8.2	5	8.2	5	8.2	5	8.2	5
0.0068	8.2	5	8.2	5	8.2	5	8.2	5
0.0082	8.2	5	8.2	5	8.2	5	8.2	5
0.01	8.2	5	8.2	5	8.2	5	8.2	5
	11	5.5	9.5	7.5	11	5.5	9.5	7.5
0.012	8.2	5	8.2	5	8.2	5	8.2	5
	11	5.5	9.5	7.5	11	5.5	9.5	7.5
0.015	8.2	5	8.2	5	8.2	5	8.2	5
	11	5.5	9.5	7.5	11	5.5	9.5	7.5
0.018	8.2	5	8.2	5	8.2	5	8.2	5
	11	5.5	9.5	7.5	11	5.5	9.5	7.5
0.022	8.2	5	8.2	5	8.2	5	8.2	5
	11	5.5	9.5	7.5	11	5.5	9.5	7.5
0.027	8.2	5	8.2	5	8.2	5	8.2	5
	11	5.5	9.5	7.5	11	5.5	9.5	7.5
0.033	8.2	5	8.2	5	8.2	5	8.2	5
	11	5.5	9.5	7.5	11	5.5	9.5	7.5
0.039	8.2	5	8.2	5	8.2	5	8.2	5
	11	5.5	9.5	7.5	11	5.5	9.5	7.5
0.047	8.2	5	8.2	5	8.2	5	8.2	5
	11	5.5	9.5	7.5	11	5.5	9.5	7.5
0.056	8.2	5	8.2	5	8.2	5	8.2	5
	11	5.5	9.5	7.5	11	5.5	9.5	7.5
0.068	8.2	5	8.2	5	8.2	5	8.2	5
	11	5.5	9.5	7.5	11	5.5	9.5	7.5
0.082	8.2	5	8.2	5	8.2	5	8.2	5
	11	5.5	9.5	7.5	11	5.5	9.5	7.5
0.1	8.2	5	8.2	5	8.2	5	8.2	5
	11	5.5	9.5	7.5	11	5.5	9.5	7.5
0.12	8.2	5.5	8.5	5	8.2	5.5	8.5	5
	11	5.5	9.5	7.5	11	5.5	9.5	7.5
0.15	8.2	5.5	8.5	5	8.2	5.5	8.5	5
	11	5.5	9.5	7.5	11	5.5	9.5	7.5
0.18	8.2	5.5	8.5	5	8.2	5.5	8.5	5
	11	5.5	9.5	7.5	11	5.5	9.5	7.5
0.22	8.2	5.5	8.5	5	8.2	5.5	8.5	5
	11	5.5	9.5	7.5	11	5.5	9.5	7.5

Please visit our website to get more update data, those data & specification are subject to change without notice.

## Mini Met Polyester Film Capacitor – JFE

STANDARD SIZE (mm)								
VDC Mfd	50/63V				100V			
	L	T	H	P	L	T	H	P
0.27	8.2	5.5	8.5	5	8.2	5.5	8.5	5
	11	5.5	9.5	7.5	11	5.5	9.5	7.5
0.33	8.2	5.5	9.5	5	8.2	5.5	9.5	5
	11	6	10	7.5	11	6	10	7.5
0.39	8.2	5.5	9.5	5	8.2	5.5	9.5	5
	11	6	10	5	11	6	10	5
0.47	8.2	6	10	5	8.2	6	10	5
	11	6	10	7.5	11	6	10	7.5
0.56	8.2	6	10	5	8.2	6	10	5
	11	6	10	5	11	6	10	5
0.68	8.2	6	11	5	8.2	6	11	5
	11	6	10	7.5	11	6	10	7.5
0.82	8.2	6.2	12.5	5	8.2	6.2	12.5	5
	11	6.6	13	5	11	6.6	13	5
1	8.2	6	10.5	7.5	11	6	10.5	7.5
	11	7.5	13.5	5	11	7.5	13.5	5
1.5	8.2	6.5	12	7.5	11	6.5	12	7.5
	11	8	13.5	5	11	8	13.5	5
2.2	8.2	7.5	13	7.5	11	7.5	13	7.5
	11	8	13.5	5	11	8	13.5	5
3.3	10.5	9	14.5	7.5	10.5	9	14.5	7.5
	11	8.5	14.5	7.5	11	8.5	14.5	7.5

STANDARD SIZE (mm)												
VDC Mfd	250V				400V				630V			
	L	T	H	P	L	T	H	P	L	T	H	P
0.001~0.0056	8.2	5	8.2	5	8.2	5	8.2	5	8.2	5	8.2	5
0.0068	8.2	5	8.2	5	8.2	5	8.2	5	8.2	5	8.2	5
0.0082	8.2	5	8.2	5	8.2	5	8.2	5	8.2	5.5	8.5	5
	8.2	5	8.2	5	8.2	5	8.2	5	8.2	5.8	9	5
0.01	11	5.5	9.5	7.5	11	5.5	9.5	7.5	11	5.5	9.5	7.5
	8.2	5	8.2	5	8.2	5	8.2	5	8.2	6	9.5	5
0.012	11	5.5	9.5	7.5	11	5.5	9.5	7.5	11	5.5	9.5	7.5
	8.2	5	8.2	5	8.2	5	8.2	5	8.2	6.2	9.8	5
0.015	11	5.5	9.5	7.5	11	5.5	9.5	7.5	11	5.5	9.5	7.5
	8.2	5	8.2	5	8.2	5	8.2	5	8.2	6.3	10	5
0.018	11	5.5	9.5	7.5	11	5.5	9.5	7.5	11	5.5	9.5	7.5
	8.2	5	8.2	5	8.2	5	8.2	5	8.2	6.5	10.3	5
0.022	11	5.5	9.5	7.5	11	5.5	9.5	7.5	11	5.5	9.5	7.5
	8.2	5	8.2	5	8.2	5	8.2	5	8.2	6.6	10.5	5
0.027	11	5.5	9.5	7.5	11	5.5	9.5	7.5	11	5.5	9.5	7.5
	8.2	5	8.2	5	8.2	5	8.2	5	8.2	6.8	10.8	5
0.033	11	5.5	9.5	7.5	11	5.5	9.5	7.5	11	5.5	9.5	7.5
	8.2	5	8.2	5	8.2	5	8.2	5	11	5.5	9.5	7.5
0.039	11	5.5	9.5	7.5	11	5.5	9.5	7.5	11	5.5	9.5	7.5
	8.2	5	8.2	5	8.2	5	8.2	5	11	5.5	9.5	7.5
0.047	11	5.5	9.5	7.5	11	5.5	9.5	7.5	11	5.5	9.5	7.5
	8.2	5.5	8.5	5	8.2	5.5	9.5	5	11	5.5	9.5	7.5
0.056	11	5.5	9.5	7.5	11	5.5	9.5	7.5	11	5.5	9.5	7.5
	8.2	5.5	8.5	5	8.2	6	10	5	11	5.5	9.5	7.5
0.068	11	5.5	9.5	7.5	11	5.5	9.5	7.5	11	5.5	9.5	7.5
	8.2	5.5	9.5	5	8.2	6	10	5	11	5.5	9.5	7.5
0.082	11	5.5	9.5	7.5	11	5.5	9.5	7.5	11	5.5	9.5	7.5
	8.2	5.5	9.5	5	8.2	6.5	11	5	11	5.5	9.5	7.5
0.1	11	5.5	9.5	7.5	11	5.5	9.5	7.5	11	5.5	9.5	7.5
	8.2	6	10	5	8.2	6.5	11	5	11	5.5	9.5	7.5
0.12	11	5.5	9.5	7.5	11	5.5	9.5	7.5	11	5.5	9.5	7.5
	8.2	6	10	5	8.2	7	12	5	11	5.5	9.5	7.5
0.15	11	5.5	9.5	7.5	11	5.5	9.5	7.5	11	5.5	9.5	7.5
	8.2	6.5	11	5	8.2	7.5	12.5	5	11	5.5	9.5	7.5
0.18	11	5.5	9.5	7.5	11	5.5	9.5	7.5	11	5.5	9.5	7.5
	8.2	6.5	11	5	8.2	8	13	5	11	5.5	9.5	7.5
0.22	11	5.5	9.5	7.5	11	5.5	9.5	7.5	11	5.5	9.5	7.5
	8.2	7	12	5	11	5.5	9.5	7.5	11	5.5	9.5	7.5
0.27	11	5.5	9.5	7.5	11	5.5	9.5	7.5	11	5.5	9.5	7.5
	8.2	8	13	5	11	9	14	7.5	11	5.5	9.5	7.5
0.33	11	7	12	7.5	11	9	14	7.5	11	5.5	9.5	7.5
	8.2	8	13	5	11	9	14	7.5	11	5.5	9.5	7.5
0.39	11	8	13	5	11	9	14	7.5	11	5.5	9.5	7.5
	8.2	8	13	5	11	9	14	7.5	11	5.5	9.5	7.5
0.47	11	8	13	7.5	11	9	14	7.5	11	5.5	9.5	7.5
	8.2	8.5	14	7.5	11	9	14	7.5	11	5.5	9.5	7.5
0.68	11	8.5	14	7.5	11	9	14	7.5	11	5.5	9.5	7.5
	11	10	15	7.5	11	9	14	7.5	11	5.5	9.5	7.5

Please visit our website to get more update data, those data & specification are subject to change without notice.